


## Isolation Transmitter for Unipolar mA/V Signals with Fixed Ranges

The Isolation Transmitter IsoPAQ-131P is used for isolation and conversion of 0-20 mA, 4-20 mA and 0-10 V unipolar signals.

For applications where normally one signal combination only is used, IsoPAQ-131P offers a cost-effective alternative.

The high reliability and the Protective Separation are further features, which ensure a safe system operation.



**COMPACT LINE**

COMPACT LINE is a line of very compact and cost-optimized Isolators, Transmitter Repeaters and Isolating Transmitters within the IsoPAQ family.

The small dimensions - only 60 mm deep and 11.2 mm wide - and the favorable pricing allow for space saving and economic installations.

- 3-port isolation**  
Protection against erroneous measurements due to parasitic voltages or ground loops
- Fixed ranges**  
Ready to use without any settings
- Universal power supply for 24 VAC/DC**  
Increased flexibility in industrial applications
- Protective Separation acc. to EN 61140**  
The design and high isolation level (3 kV) provides protection for service personnel and downstream devices against impermissibly high voltage
- Compact DIN-rail mounting**  
11.2 mm (0.44") housing combined with very low self heating allows for high density mounting. With a depth of only 60 mm, compact standard boxes can be used.
- Excellent reliability**  
Low self heating thanks to high-efficiency power supply provides long-term reliability and stability



## Specifications: IsoPAQ-131P

### Input

Input signal	0-20 mA	4-20 mA	0-10 V	Factory set as ordered
Input resistance	Current input	5 Ω		
	Voltage input	1 MΩ		
Overload	Current input	≤ 200 mA		
	Voltage input	≤ 250 V		

### Output

Output signal	0-20 mA	4-20 mA	0-10 V	Factory set as ordered
Load	Current output	≤ 500 Ω		
	Voltage output	≥ 2kΩ		
Residual ripple	< 10 mV <sub>rms</sub>			

### General data


Transmission error	± 0.2 % full scale			
Temperature coefficient <sup>1)</sup>	± 0.02 %/K			
Cut-off frequency -3 db	200 Hz			
Response time T <sub>99</sub>	3.5 ms			
Test voltage	3 kV AC, 50 Hz, 1 min., input against output against power supply			
Working voltage <sup>2)</sup> (Basic Insulation)	600 VAC/DC for overvoltage category II and pollution degree 2 acc. to EN 61010 part 1 between all circuits.			
Protection against electrical shock <sup>2)</sup>	Protective separation acc. to EN 61140 by reinforced insulation acc. to EN 61010 part 1 up to 300 VAC/DC for overvoltage category II and pollution degree 2 between all circuits.			
Ambient temperature	Operation	-20 to +60 °C [-4 to +140 °F]		
	Transport and storage	-35 to +85 °C [-31 to +185 °F]		
Power supply	24 VAC/DC, ± 15 %	AC 48 to 62 Hz, approx. 2 VA		
		DC approx. 0.7 W		
EMC <sup>3)</sup>	EN 61326-1			
Construction	11.2 mm [0.44 "] housing, protection class: IP20			
Connection	≤ 2.5 mm <sup>2</sup> , AWG 14			
Weight	Approx. 50 g			

1) Average TC related to full scale value in specified operating temperature range, reference temperature 23 °C

2) As far as relevant the standards and rules mentioned above are considered by development and production of our devices. In addition relevant assembly rules are to be considered by installation of our devices in other equipments. For applications with high working voltages, take measures to prevent accidental contact and make sure that there is sufficient distance or insulation between adjacent situated devices.

3) Minor deviations possible during interference


### Block diagram/Connections

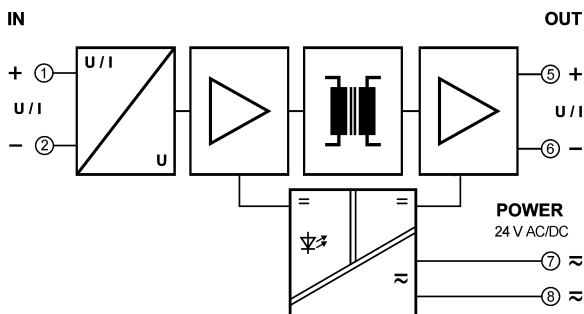

### Ordering information

Product	Input / Output	Part No.
IsoPAQ131P	0-20 mA / 0-20 mA	70ISC13112
	4-20 mA / 0-20 mA	70ISC13132
	0-10 V / 0-20 mA	70ISC13152
	0-20 mA / 4-20 mA	70ISC13114
	4-20 mA / 4-20 mA	70ISC13112
	0-10 V / 4-20 mA	70ISC13154
	0-20 mA / 0-10 V	70ISC13116
	4-20 mA / 0-10 V	70ISC13136
	0-10 V / 0-10 V	70ISC13156
	Power connector set for up to 10 units	

### Dimensions

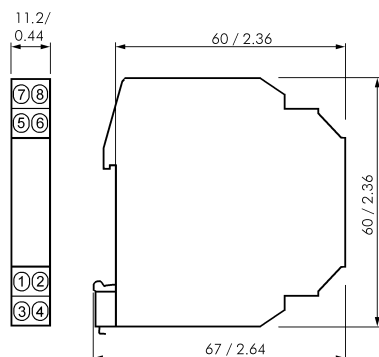

mm/inch